



Reconstruction of simulated and experimental data in the Drift Chambers of the BM@N experiment


D. Baranov, V. Palichik, M. Patsyuk, N. Voytishin
JINR



Alushta-2021
2021-06-10



Drift Chambers Reconstruction Chain

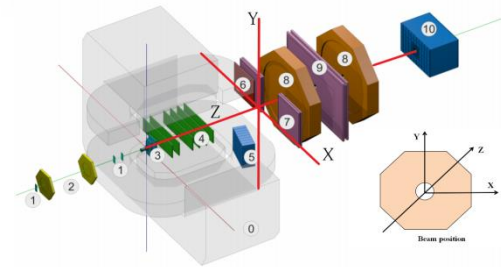

Hit reconstruction
on a particular layer





Pair hit
assembly



DC1/2
Segment
building



DC1+2 track
reconstruction

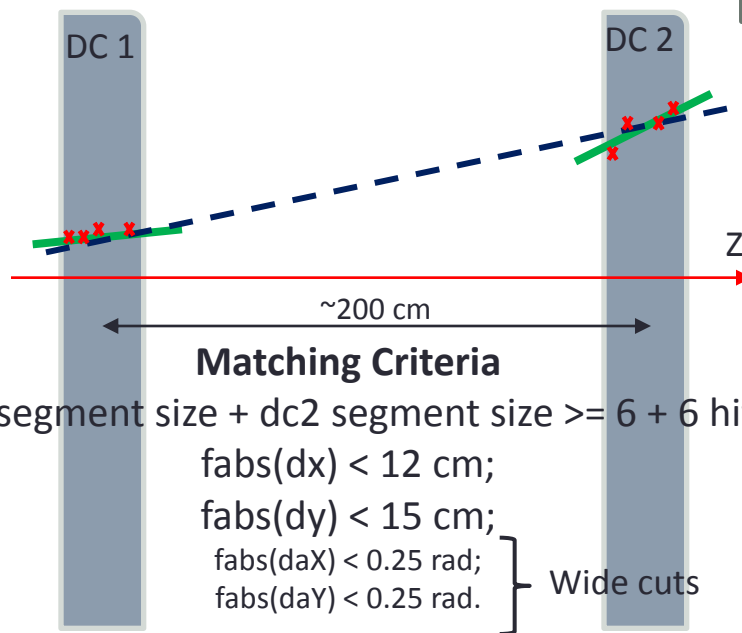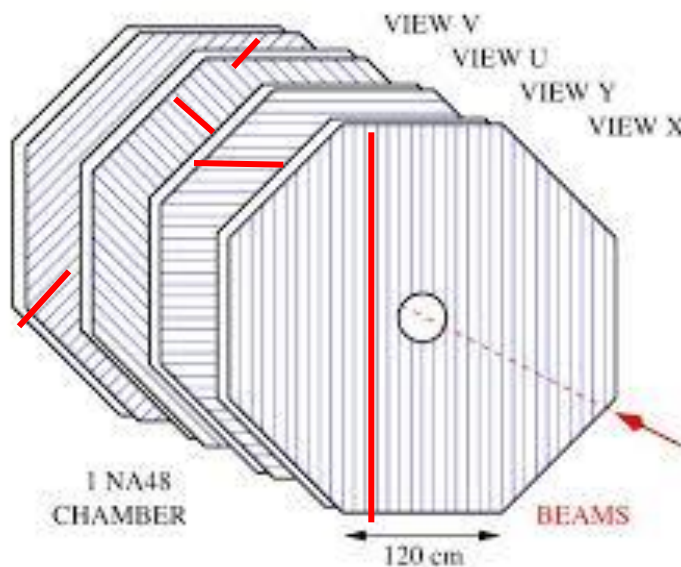

MC
Points

simulated
coordinate
smearing

input

data
digis

time transformed
into distance

MC DchHitProducer

data DchHitProducer

DchTrackFinder

DCH
Hits on layer;
Segments;
global tracks


output

[2]

Some selected residuals [Measurement – segmentFit]


C beam, empty target, B = 1200A

MC segments

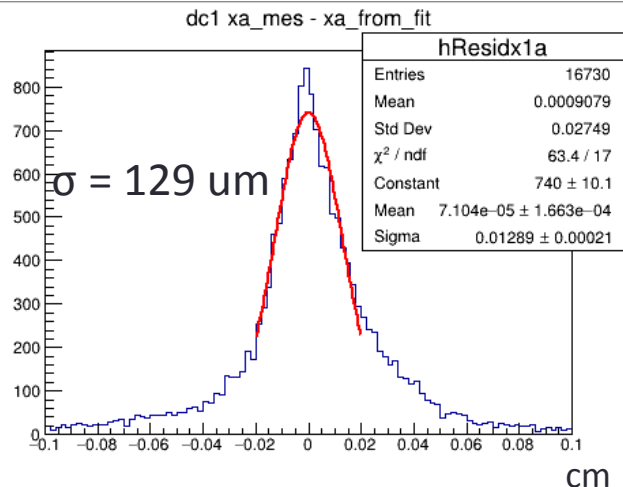


X - coordinate

Data segments

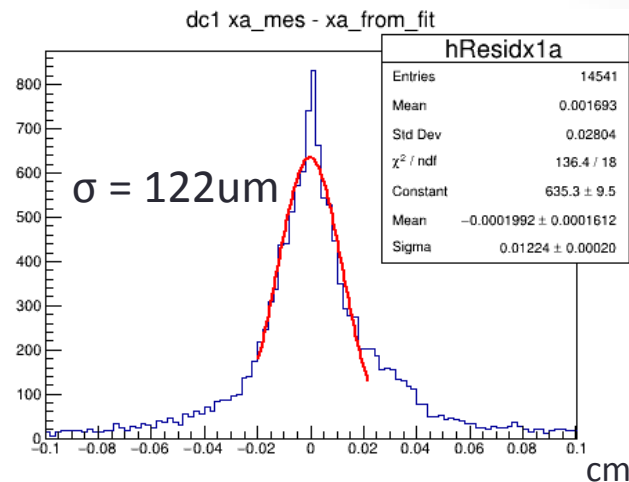


dc1 ua_mes - ua_from_fit

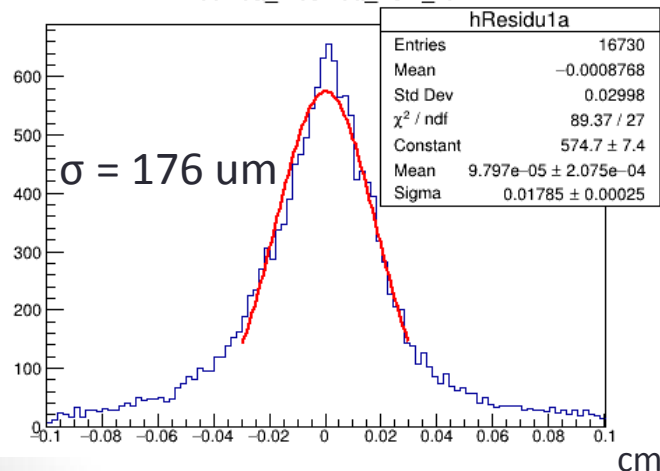

U - coordinate

dc1 ua_mes - ua_from_fit

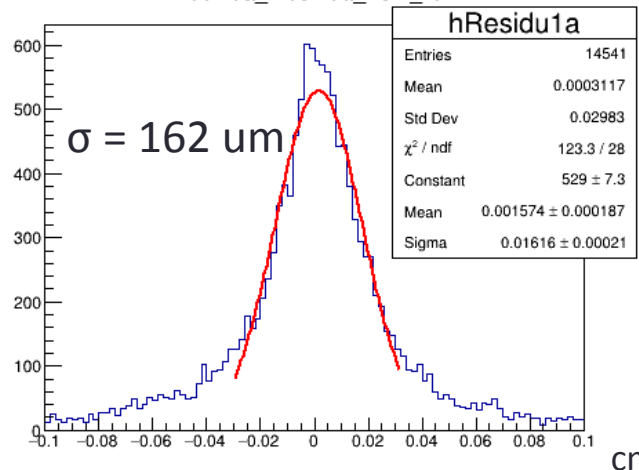


MC and data residuals are in agreement for all coordinates

Angle values and resolution

C beam, empty target, B = 1200A

MC segments


aX1

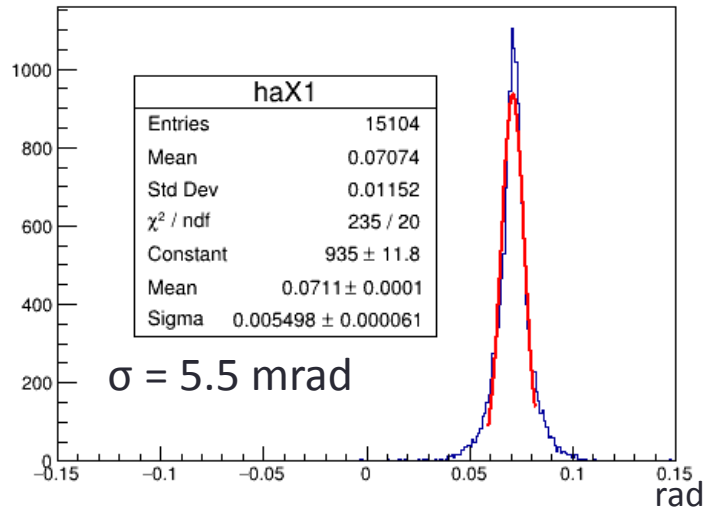


X slope

Data segments

aX1

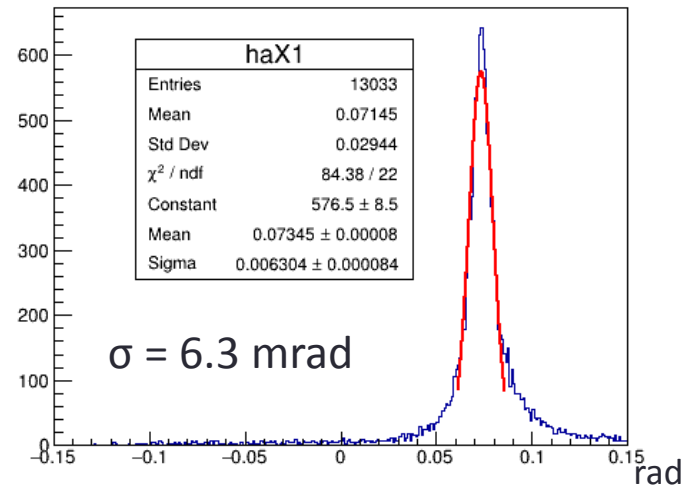


aY1

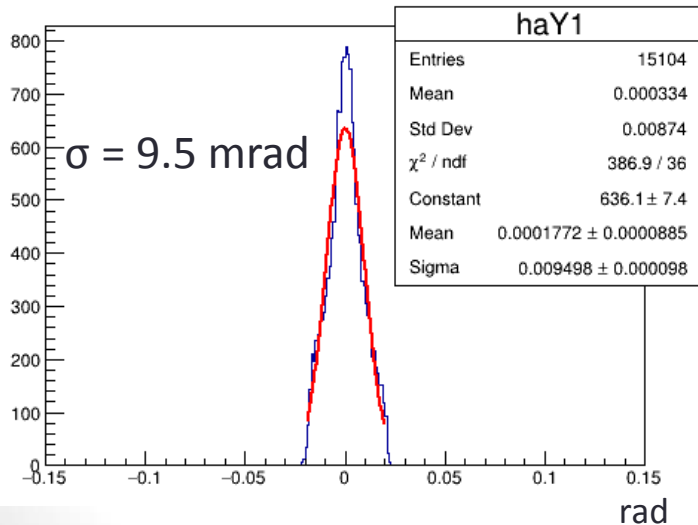

Y slope

aY1


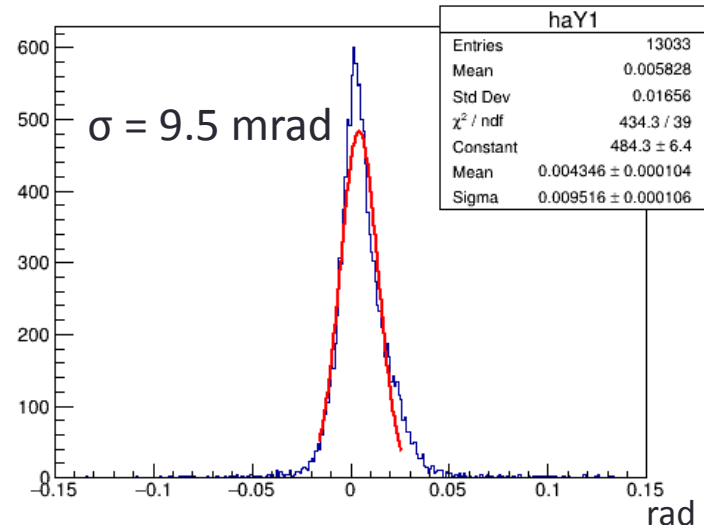


Coordinates values and beam width



C beam, empty target, B = 1200A

MC segments



Data segments

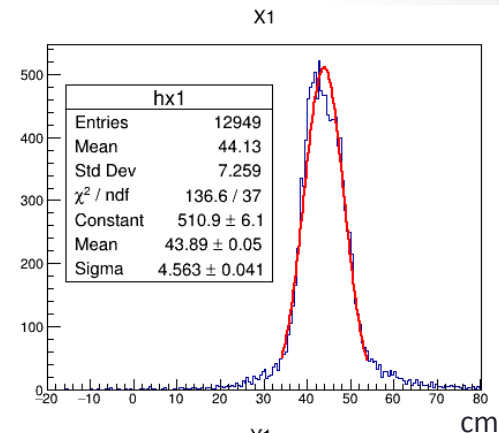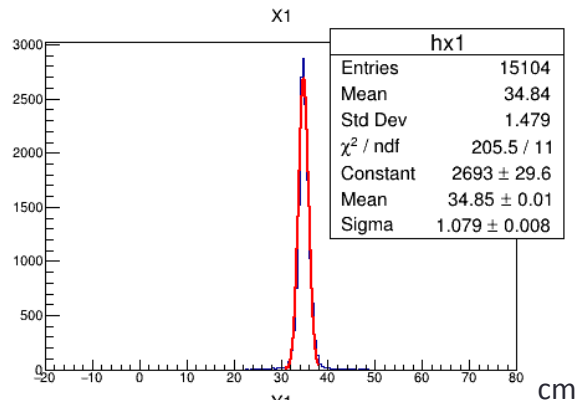

X segment
coordinate

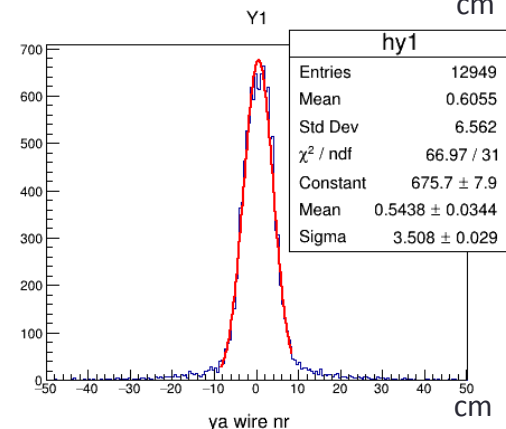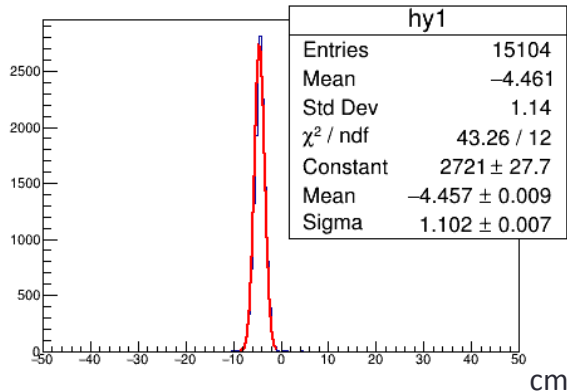

Y segment
coordinate

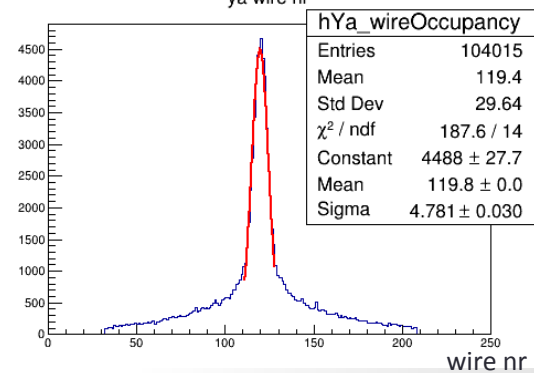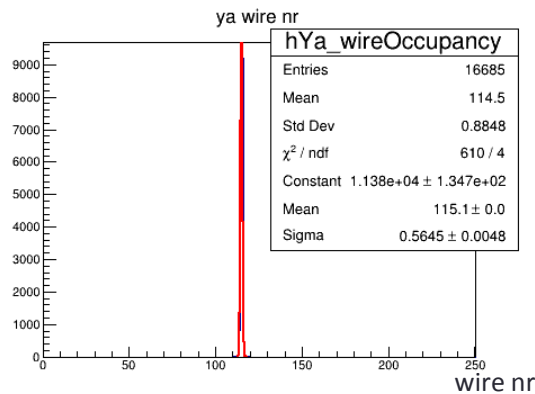


Wire
occupancy

The difference is
due to the width of
the beam

Difference in slopes between DC1 & DC2


C beam, empty target, B = 1200A

MC reco

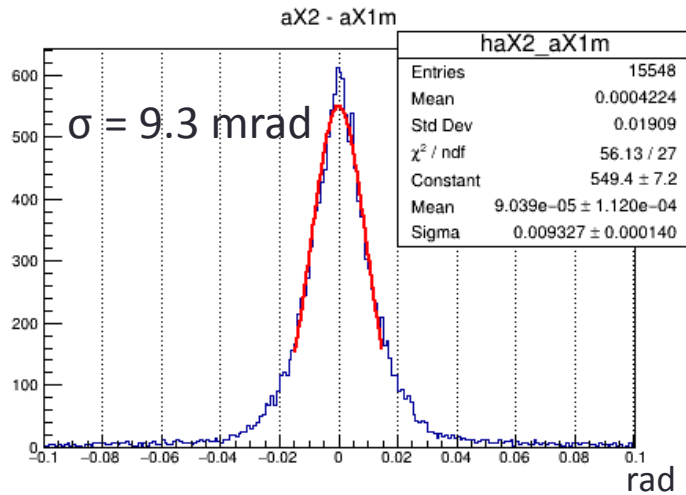


X slope

data reco


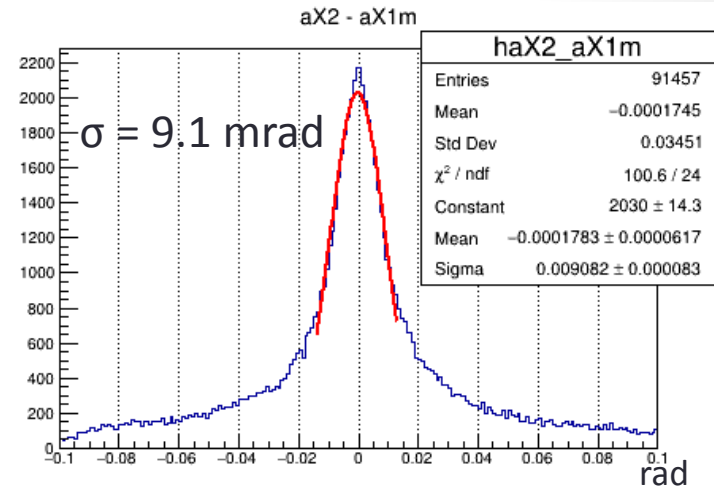


aY2 - aY1m

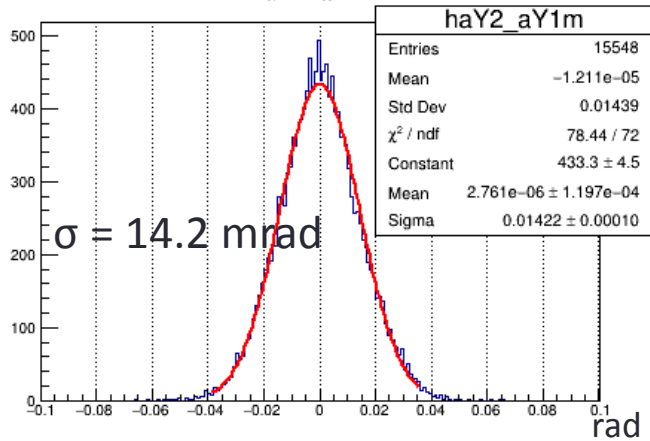

Y slope

aY2 - aY1m

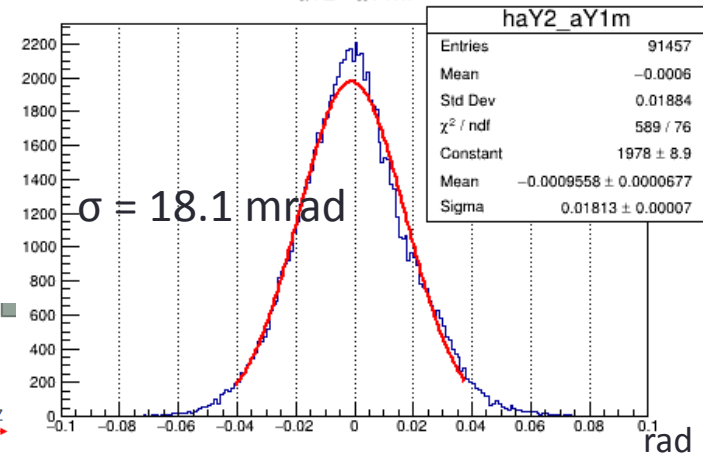






MC slope difference distributions are adequate to SRC data

Difference in coordinates for matching DC1 with DC2

C beam, empty target, B = 1200A

MC reco

data reco

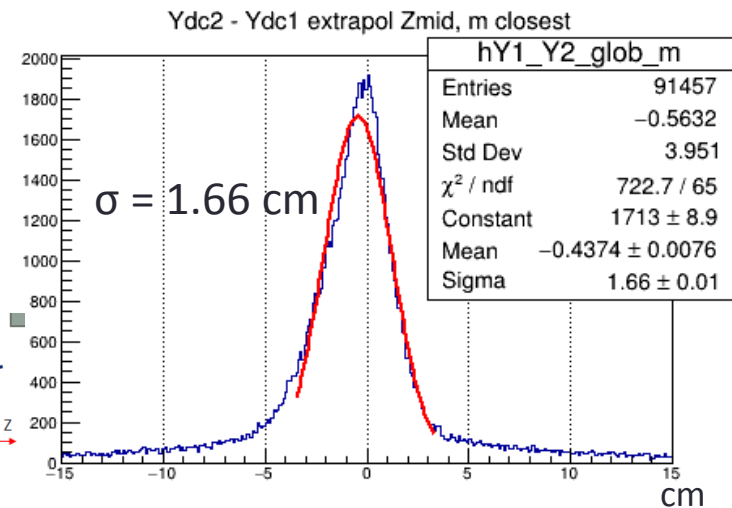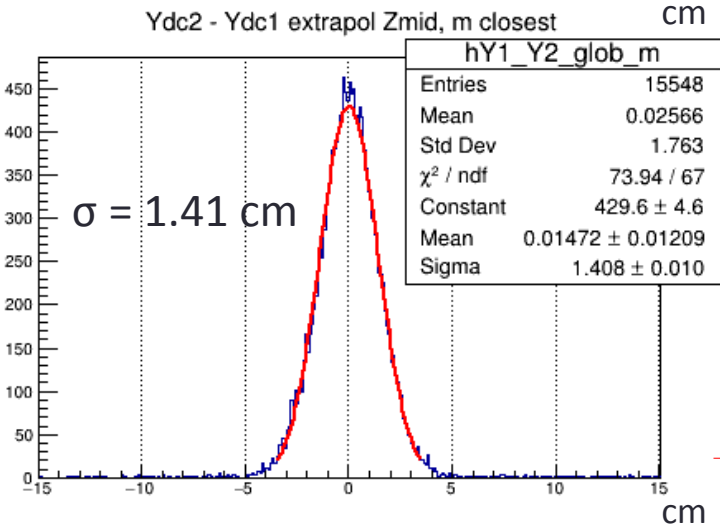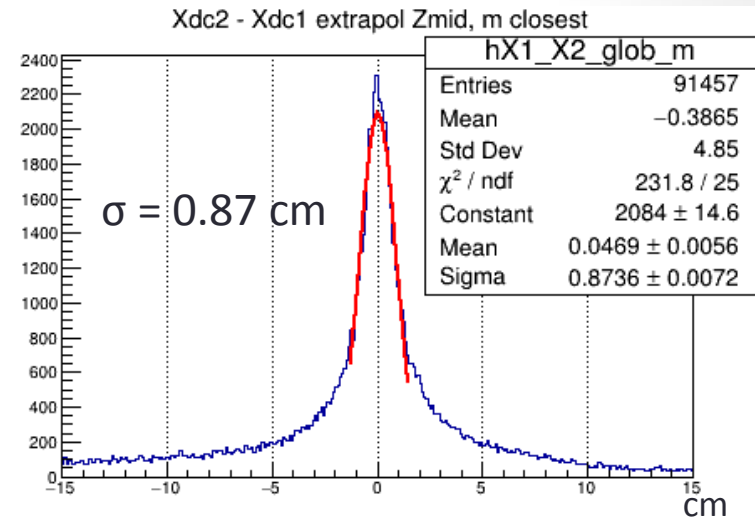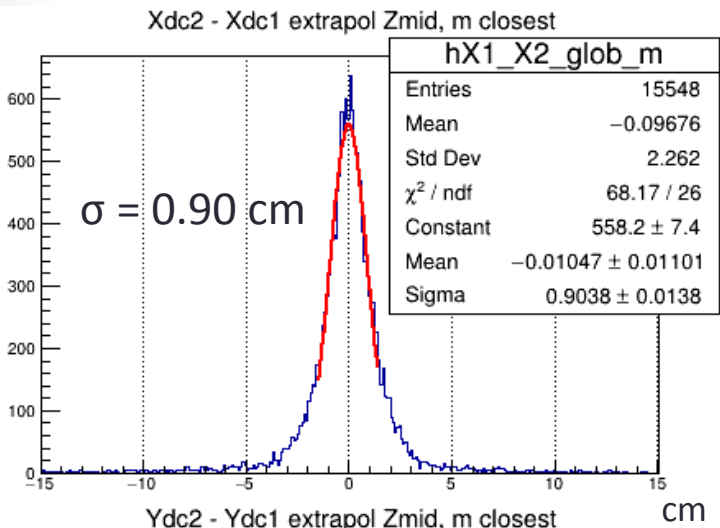


Smearing for MC coordinates is adequate to SRC data

C Beam momentum resolution estimation

C Beam, empty target, B = 1200A



MC DCH global tracks

momentum = $.3 * \text{Int}(\text{BL}) / [\sin(\alpha_{\text{out}} - \alpha_{\text{in}}) + C]$

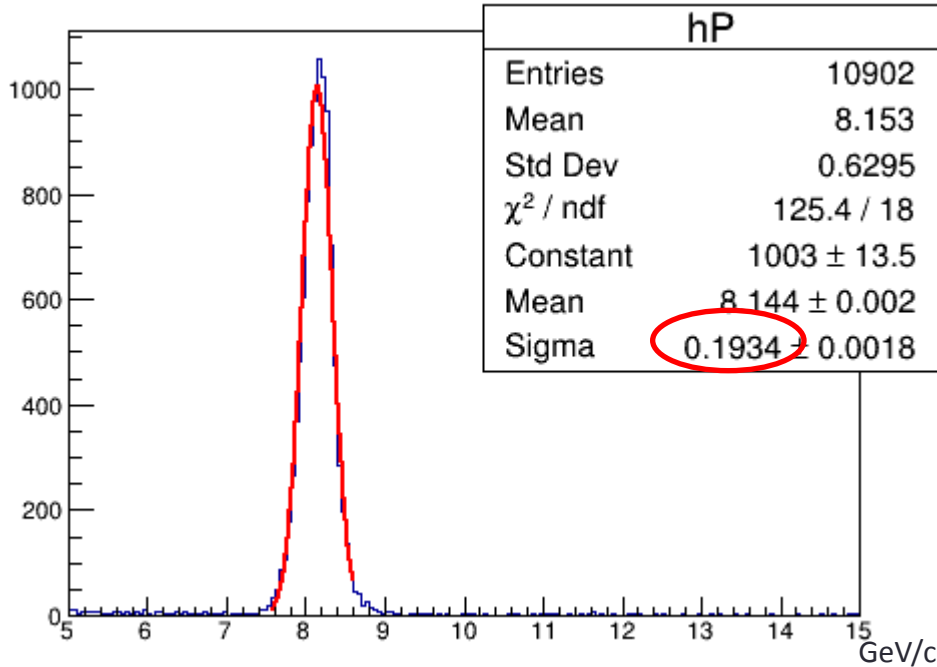

RUN7 data DCH global tracks

momentum = $.3 * \text{Int}(\text{BL}) / [\sin(\alpha_{\text{out}} - \alpha_{\text{in}}) + C]$

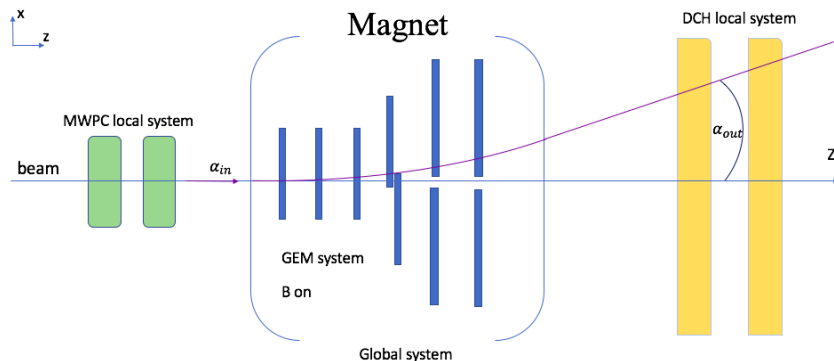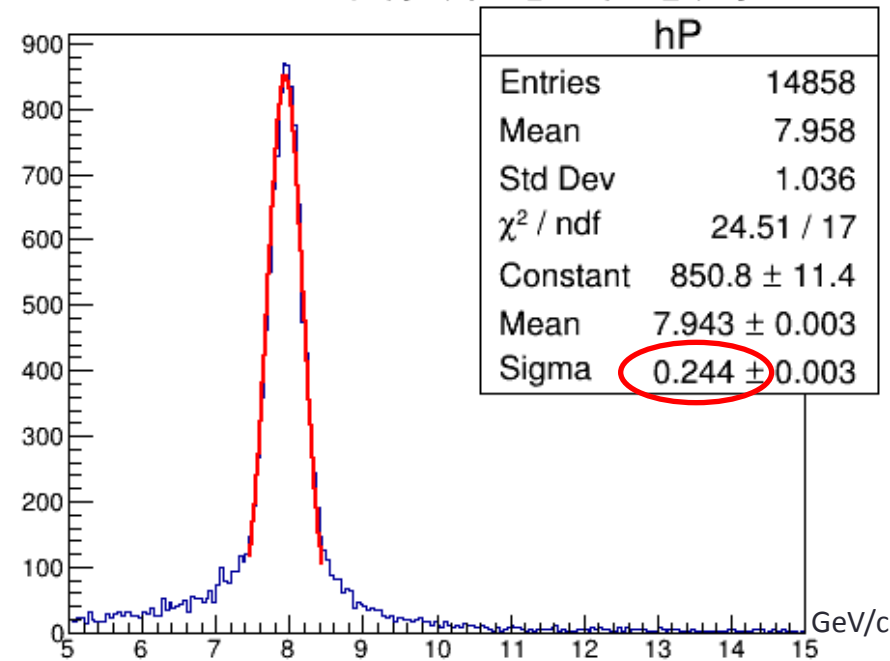



$$P_{\text{beam(est)}} = \frac{0.3 * \int B dl}{\sin(\alpha_{\text{out}} - \alpha_{\text{in}})}$$

α_{in} - angle of beam before magnet (MWPC);
 α_{out} - angles of beam after magnet (DCH);
 $\int B dl$ - magnet field integral [T*m].

Reconstruction Efficiency vs. MC hit probability

ION generator (single particle in event)

	dc1, %	dc2, %	dcGlobal, %
100% hit on layer probability	100	100	100
92% hit on layer probability	86.32	86.37	69.18



Dubna Cascade Model (DCM-QGSM)

Layer hit reconstruction probability	Particle type	dc1, %	dc2, %	dcGlobal, %
100% hit on layer probability	Ions(^{12}C , ^{10}B , ^{10}Be)	95.6	96.6	91.5
	p , e , π^+ , π^-	96.1	98.3	91.3
92% hit on layer probability	Ions(^{12}C , ^{10}B , ^{10}Be)	81.7	82.9	67.7
	p , e , π^+ , π^-	81.9	84.7	65.3

Feature. The probability that there is a detector response on layer corresponding to a particular MC point can be adjusted.

Implementation into bmnroot

GitLab Projects Groups Snippets Help

bm@N bmnroot

Project overview

Repository

Files

Commits

Branches

Tags

Contributors

Graph

Compare

Issues 29

Merge Requests 0

NICA > bmnroot > Commits

dev bmnroot / dch

23 Oct, 2020 4 commits

Update BmnDchHitProducer.cxx
Nikolay Voytishin authored 2 weeks ago

BmnDchTrackFinder.cxx adjusted for reconstruction of MC and experimental data
Nikolay Voytishin authored 2 weeks ago

BmnDchTrackFinder.h adjusted for reconstruction of MC and experimental data
Nikolay Voytishin authored 2 weeks ago

BmnDchHitProducer.cxx adjusted MC hit reconstruction
Nikolay Voytishin authored 2 weeks ago


22 Oct, 2020 1 commit

adjusting simulation for DCH
Nikolay Voytishin authored 2 weeks ago

Unified DCH tracking for SRC/BM@N/MC/EXP was implemented into bmnroot.

Conclusions

- Realistic response of DCH added in simulation procedure
- Residuals and segment parameters are in agreement between MC and data
- The differences for matching between two DCH chambers in slopes and coordinates are quite similar for MC and data
- Tracking unified for SRC/BM@N/MC/EXP
- The full reconstruction chain for Dift Chambers is available in *bmnroot* package.
- *Detailed investigation of reconstruction efficiency and resolution adjustments is ongoing.*

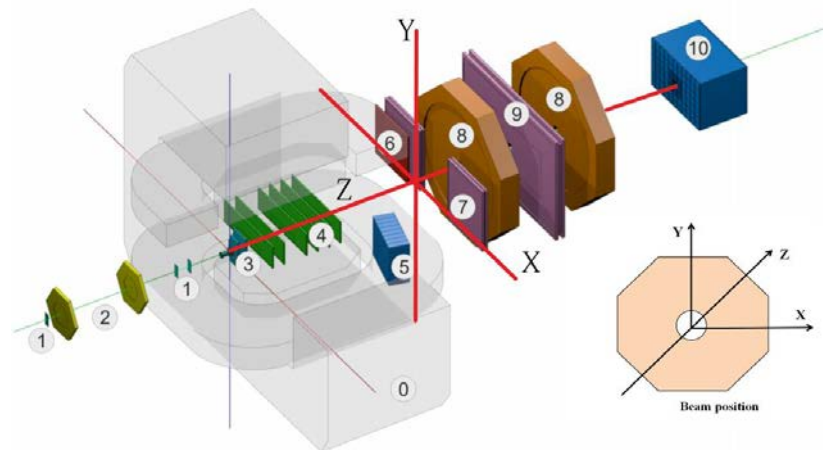


backup

Ar beam e.m. contaminated MC data vs. Ar data

Ar beam, empty target, B = 1250A

DCH1 reconstructed segments local coordinates

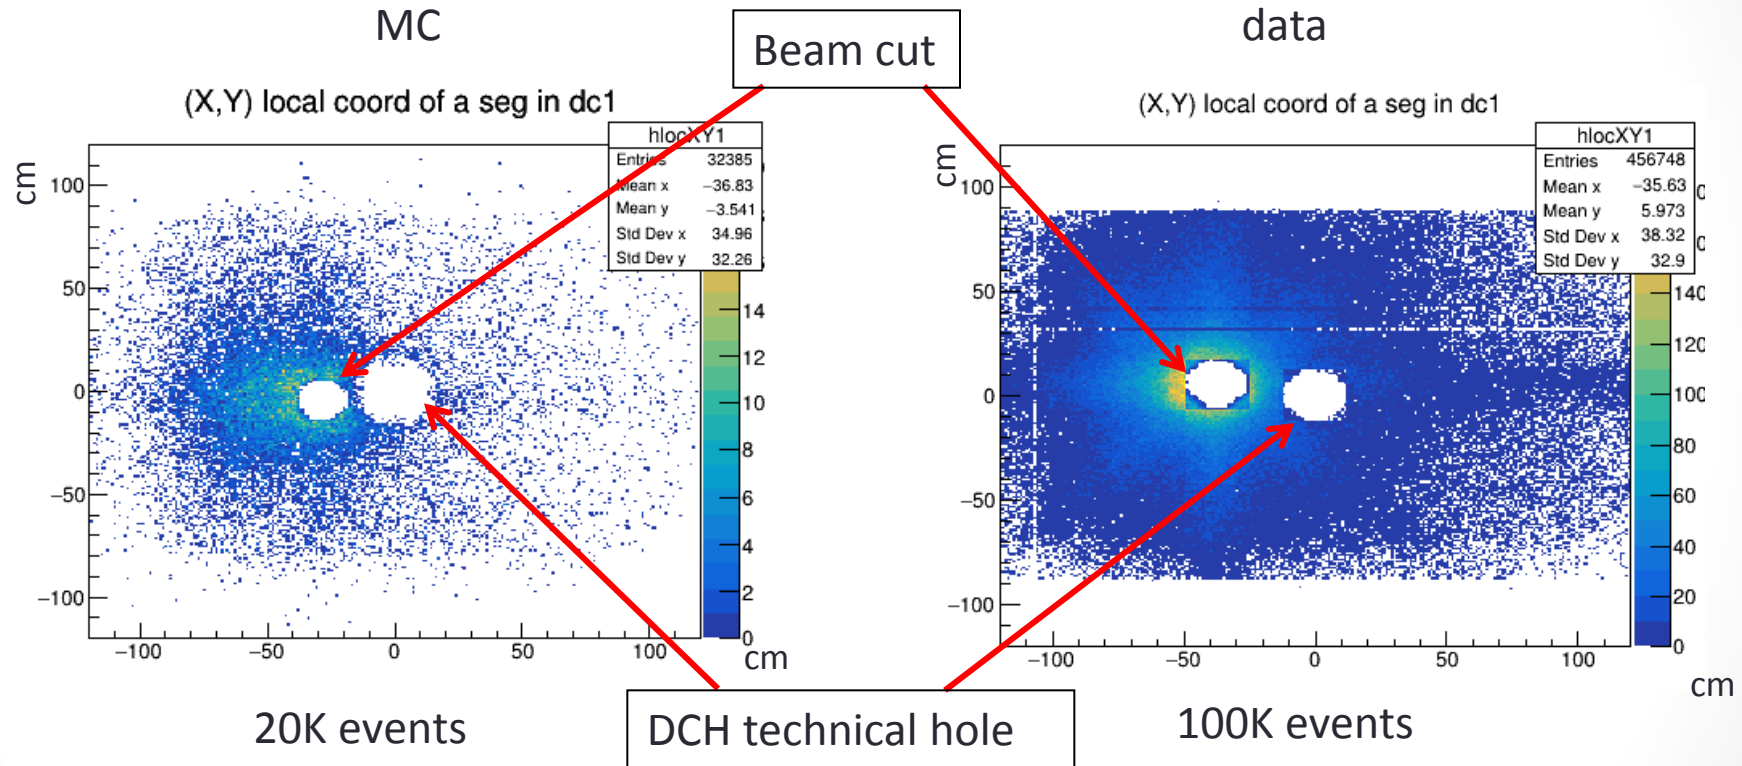



Remark. Cut on beam region applied in order for reconstruction to work properly

Difference in slopes for DC1 & DC2

MC



Ar Beam, empty target, B = 1250A

data

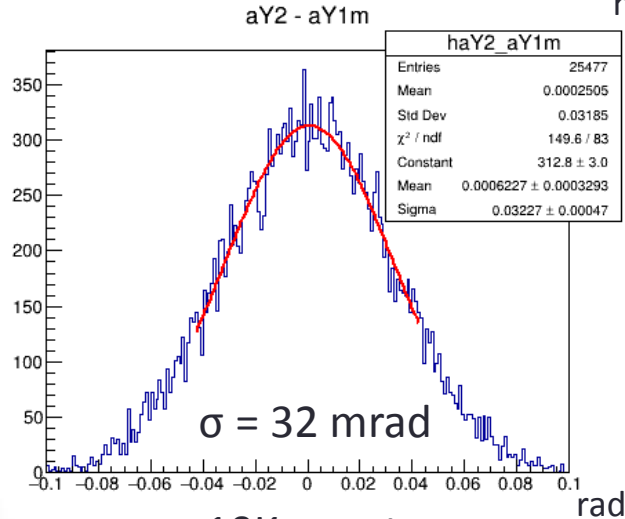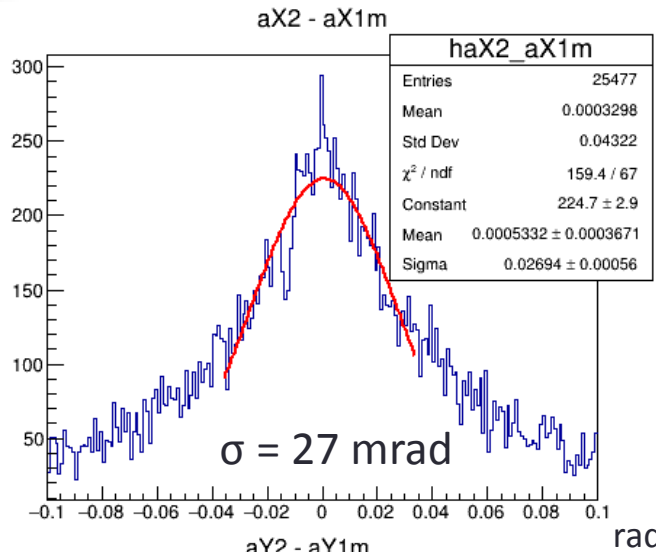

10K events

X slope

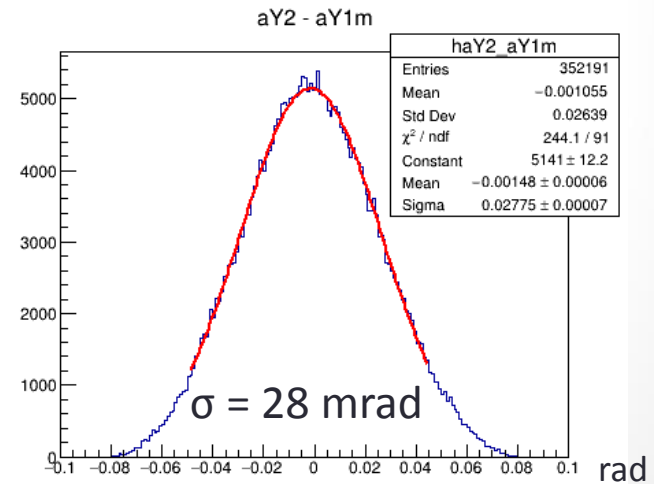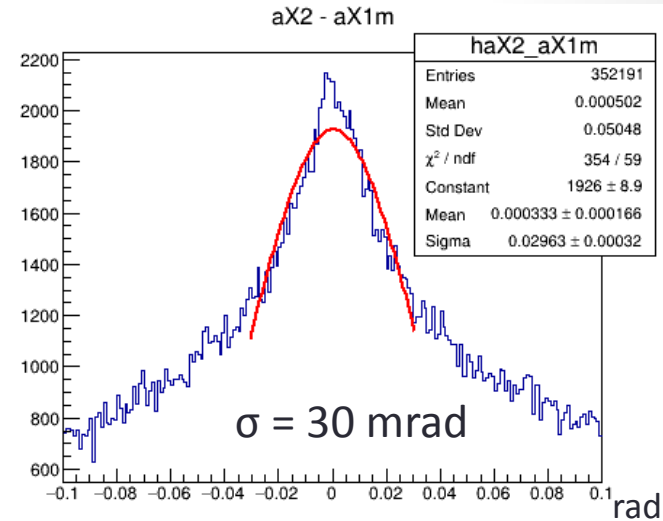

100K events

Y slope



MC slope difference distributions are adequate to Ar data

Difference in coordinates for matching DC1 with DC2



Ar Beam, empty target, B = 1250A

MC reco

data reco

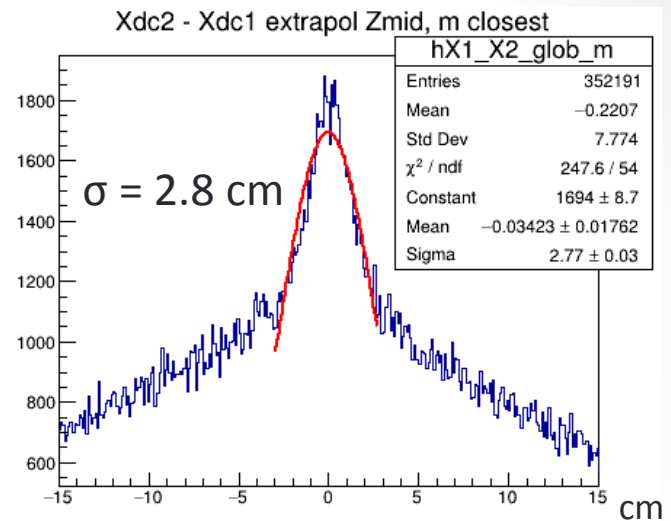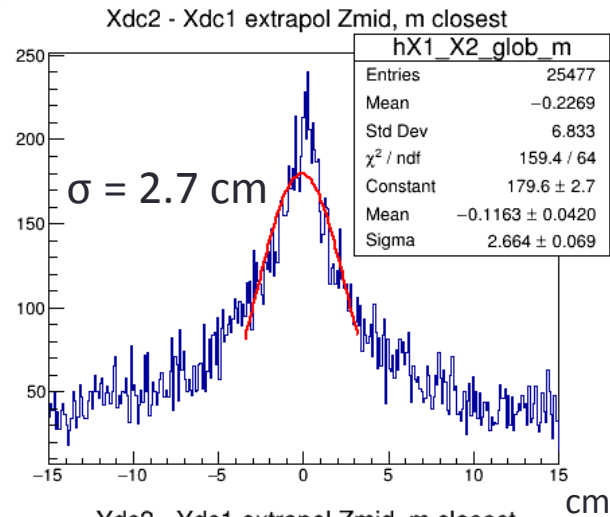




X

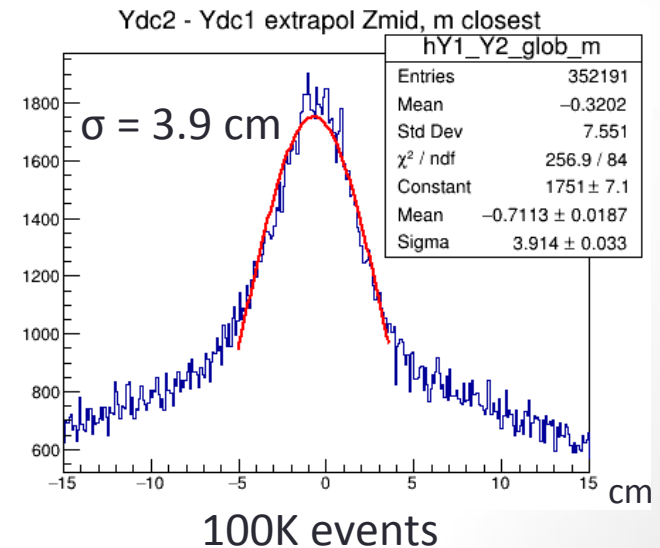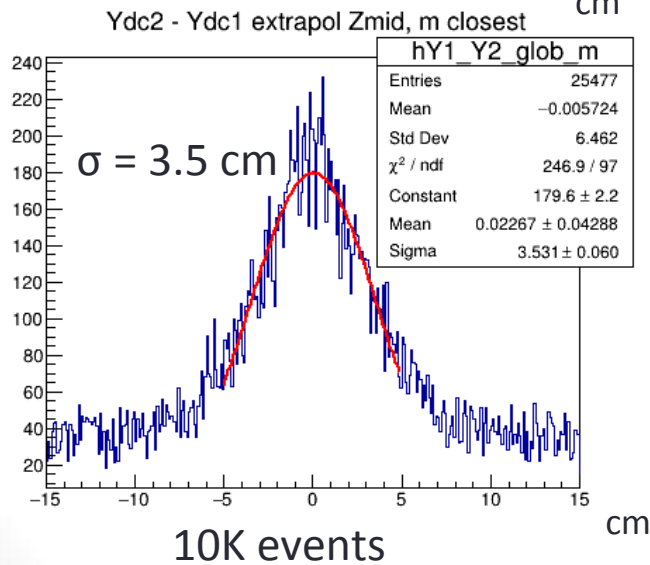

Y

Smearing for MC coordinates is adequate to Ar data

Drift Chambers coordinate reconstruction on a layer

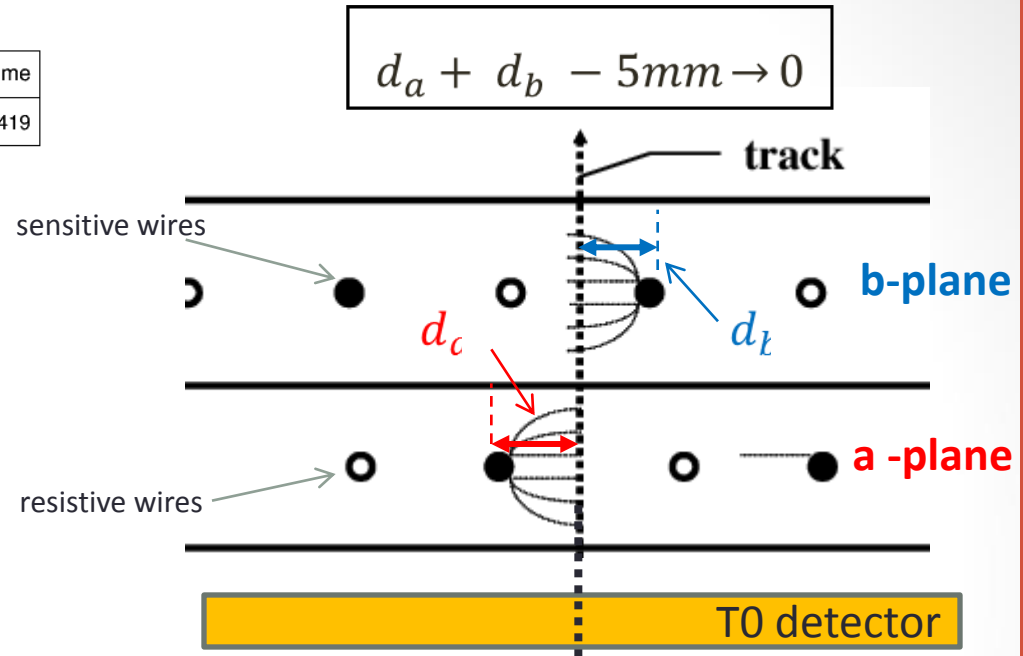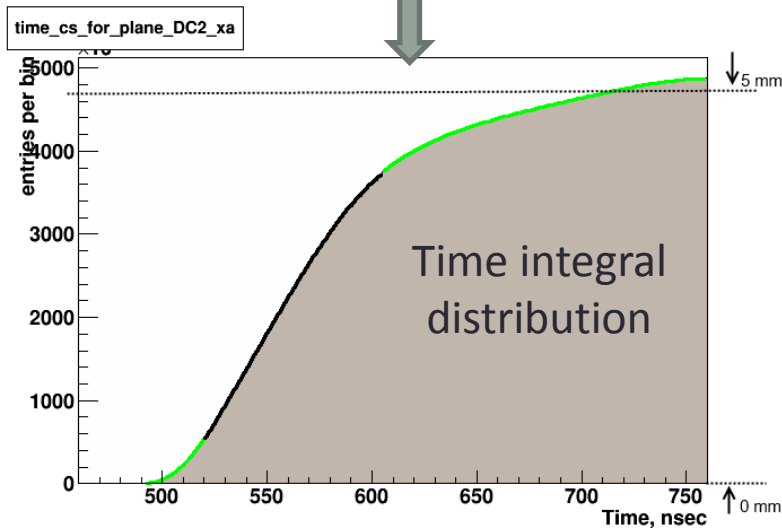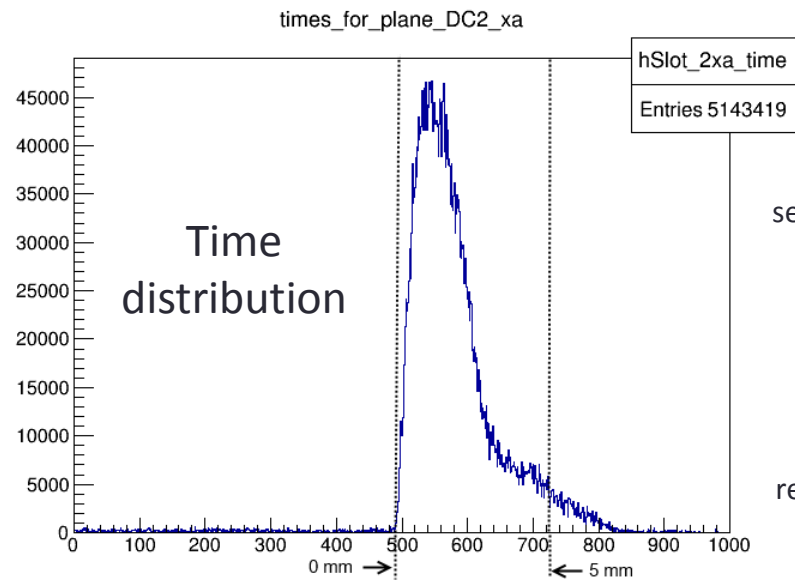

- 4 double coordinate planes: 2x; 2y, 2u, 2v;
- wire angles $0^\circ, 90^\circ, \pm 45^\circ$;
- wire pitch 10 mm;
- $Y_{\text{out}} \pm 1.35 \text{ m}$, $X_{\text{out}} \pm 1.35 \text{ m}$;
- $R_{\text{hole}} = 10 \text{ cm}$;
- 2048 wires per chamber.

Drift Chambers Reconstruction & Performance

Hit reconstruction
on a particular layer




Pair hit
assembly




Segment
reconstruction



Global track
reconstruction

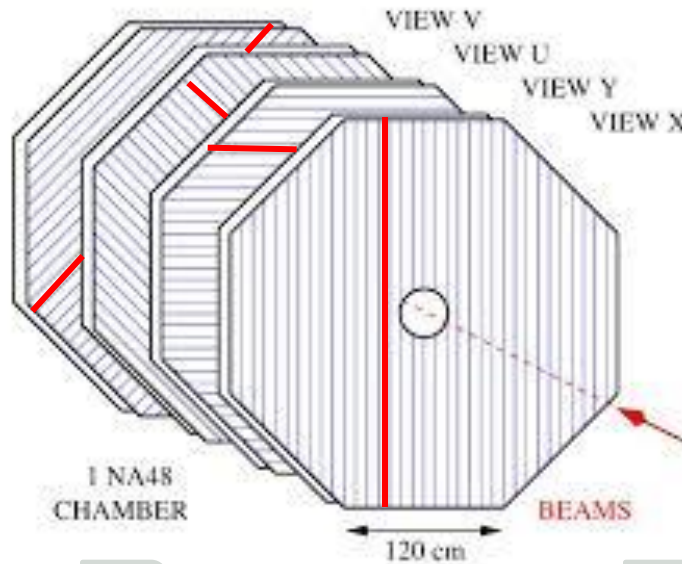


$$X = \frac{V-U}{\sqrt{2}};$$
$$Y = \frac{V+U}{\sqrt{2}};$$

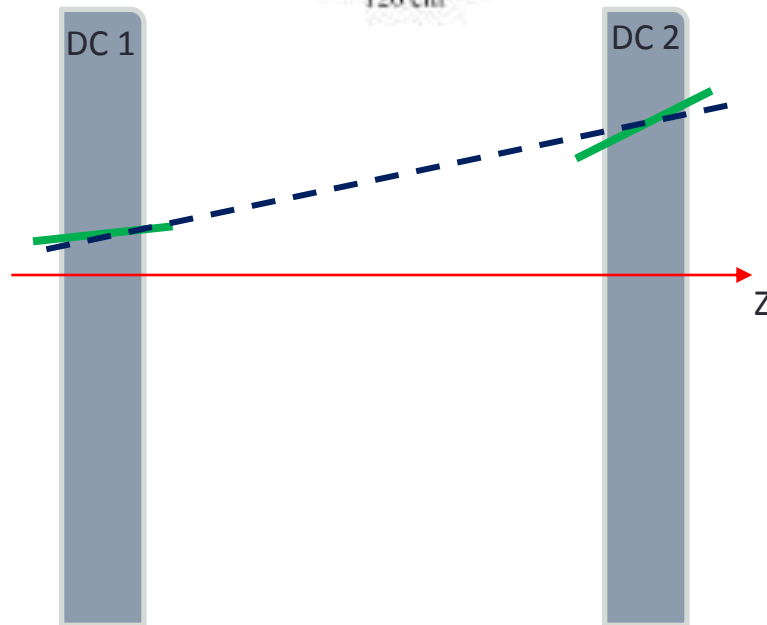


- 4 double coordinate planes;
- wire angles $0^\circ, 90^\circ, \pm 45^\circ$;
- wire pitch 10 mm;
- $Y_{out} \pm 1.35 \text{ m}, X_{out} \pm 1.35 \text{ m}$;
- $R_{hole} = 10 \text{ cm}$;
- 2048 wires per chamber.

MCHit -> smeared SimHit

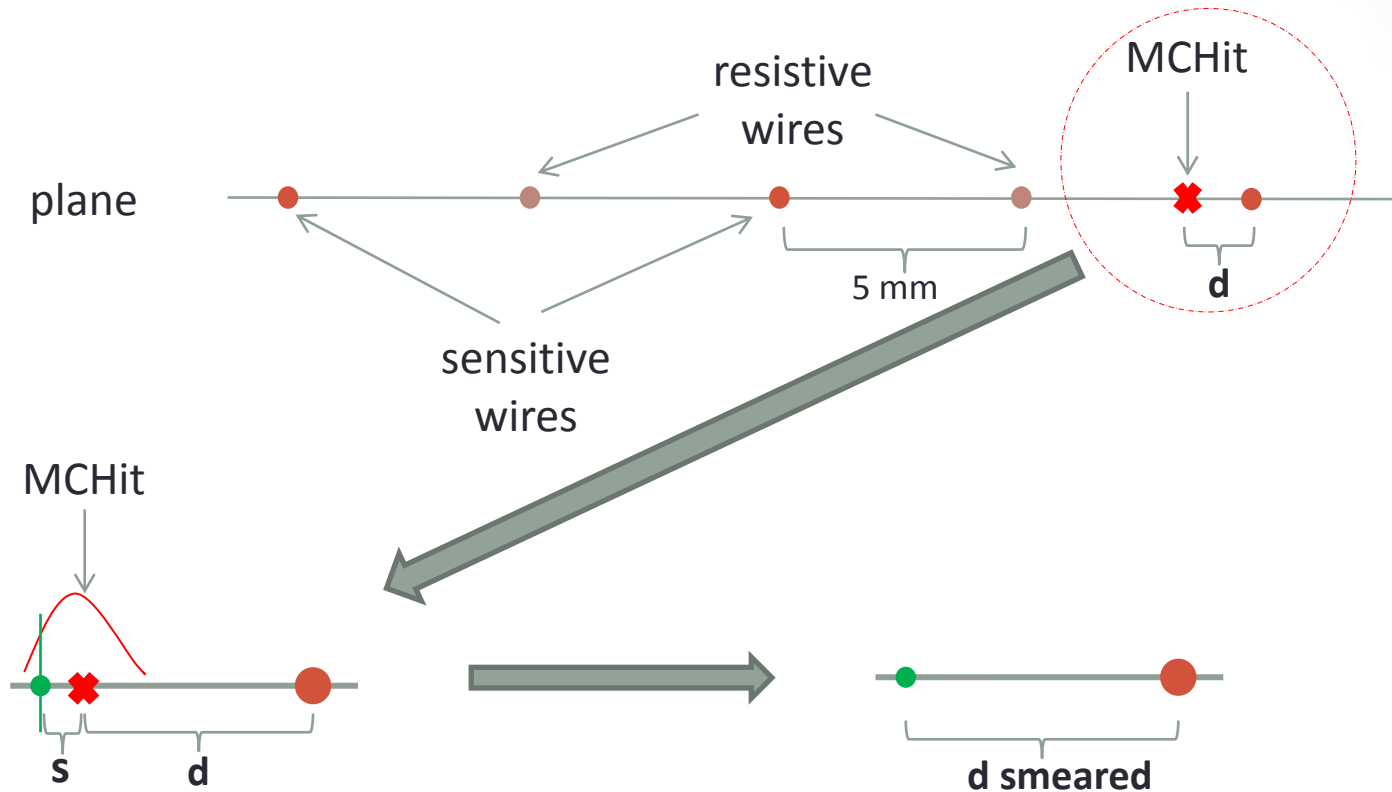

According to d certain errors are used for Gaus smearing

If $d_smeared < 0$ || $d_smeared > 5\text{ mm}$
the hit is reflected relative to the edge

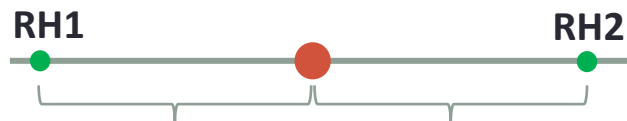

2 RecHits are obtained from the smeared SimHit